




## Mechanical Fastening Preparation Dimensions

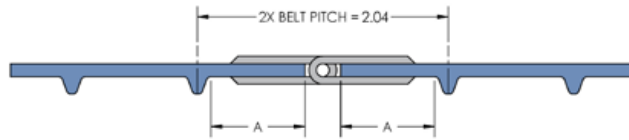

PC10 Lacing	Dimension A
Flexco® UX1SS Clipper® Wire Hook	0.85" (21.5 mm)
Flexco® APF100 Alligator® Plastic Rivet	0.79" (20 mm)
Flexco® RS62 Alligator® Ready Set™ Staple	0.79" (20 mm)

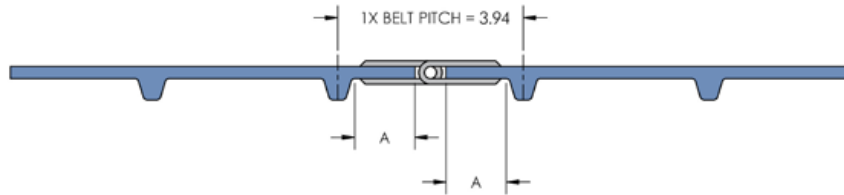


PC20 Lacing	Dimension A
Flexco® UX1SS Clipper® Wire Hook	0.73" (18.5 mm)

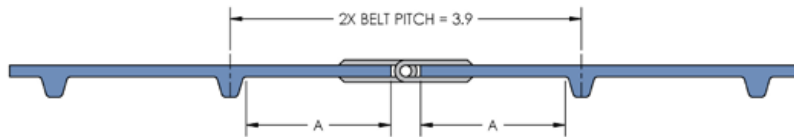


PC20 Lacing	Dimension A
Flexco® APF150 Alligator® Plastic Rivet	1.65" (42 mm)
Flexco® RS125 Alligator® Ready Set™ Staple	1.65" (42 mm)

# Joining

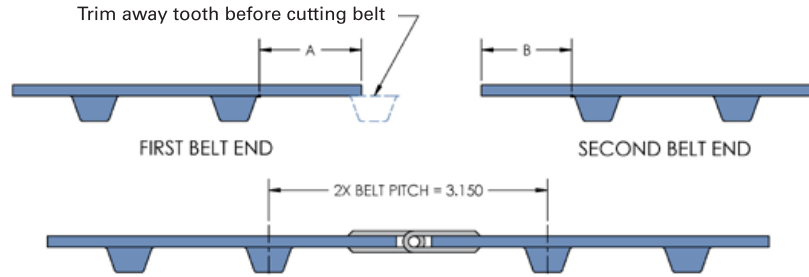

CC40 Lacing	Dimension A	Dimension B
Flexco® APF150 Alligator® Plastic Rivet	1.18" (30 mm)	1.05" (26.5 mm)
Flexco® RS125 Alligator® Ready Set™ Staple	1.18" (30 mm)	1.05" (26.5 mm)

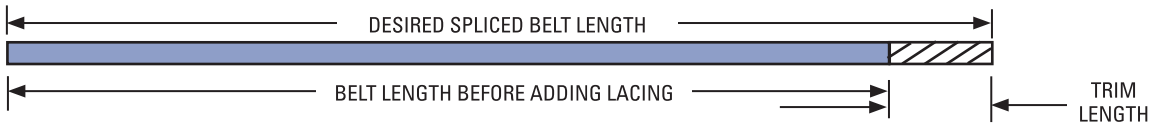

FC9/12 Belt Length Before Adding Lacing = Desired Spliced Belt Length - Trim Length	
	Trim Length
Flexco® UX1SS Clipper® Wire Hook	0.22" (5.5 mm)
Flexco® APF100/150 Alligator® Plastic Rivet	0.28" (7.0 mm)
Flexco® RS62/125 Alligator® Ready Set™ Staple	0.39" (10 mm)